

User manual

H.265 / HEVC Full HD IPTV Box
Linux OS Multimedia Receiver

Golden Interstar Beta X



www.golden-interstar.de

CAUTION!

To avoid the risk of electric shock, do not disassemble the receiver.
There are no user-serviceable parts inside.
Refer servicing to qualified service personnel.
This receiver was manufactured in accordance with international safety standards.
Please read the following precautions carefully.

Safety Instructions and Precautions:

- Power supply network connection (100-240V ~ 50/60Hz)

- Connect this receiver only to the type of network indicated on the label
- Unplug the receiver from the electrical outlet before beginning any maintenance or installation

- Connecting to antenna

- Disconnect the receiver from the network before connecting or disconnecting the cable from the antenna
- Failure to do so may result in damage to the receiver or antenna

- Connecting to a TV

- Unplug the receiver from the electrical outlet before connecting or disconnecting the cable from the TV
- Failure to comply may result in damage to the receiver or TV

- Liquids

- The receiver must not be exposed to liquids of **ANY** kind!

- Cleaning

- Unplug the receiver from the electrical outlet before cleaning
- To remove dust, use a light damp cloth, without solvents

- Ventilation

- Do not place the receiver on furniture or carpets
- Do not place any objects on top of the receiver

- Do not restrict air circulation around the receiver

- **Earthing**

- The antenna cable must be grounded

- **Foreign objects**

- Do not insert anything through the openings in the receiver, since you can touch a hazardous voltage point or damage the receiver

- **Location**

- Use the receiver indoors, to avoid damaging it by weather
- Do not install the receiver near a radiator or other heat source
- Dropping the product may result in personal injury and serious damage to the receiver

- **Lightning, storm**

- Unplug the receiver from the wall outlet and disconnect the antenna during a lightning storm or when unused for long periods of time
- This will prevent damage to the circuit due to lightning or voltage fluctuations

- **Repair**

- If it is necessary to repair, it is necessary to be sure of the qualification of the service
- Unauthorized repairs can lead to additional damage

- **FRONT PANEL:**



- **LED status indicator**

Displays the current status of the receiver (red / green)

- **Receiver of IR signals**

The sensor of the IR signals from remote control

- REAR AND SIDES PANELS:



- **HD OUT**
HD OUT - high quality digital audio and video output
- **SPDIF**
Digital audio output
- **AV**
Composite AV output for TV-set connection
- **ETHERNET**
Connection to Internet via LAN cable
- **DC-5V**




Power socket. Attention! You **must use the original power adapter** included with the box! Output adapter: 5 Volt direct current, 2 Ampere



- **RS-232**
For connection to PC (computer) via RS-232 serial port
- **2 USB ports**
Used to play media files, update software and work with WiFi / 3G dongles

REMOTE CONTROL



Button	Function	Button	Function
	On/Off STB power supply	+ PAGE -	Change channel + or -
	Mute	0 ~ 9	Direct input channel number
AUDIO	Choose audio	VOD	Video on demand
MENU	Show Main menu	EXIT	Exit to last menu
OK	Perform action	← →	For move in menu LEFT/RIGHT
↑ ↓	For move in menu UP/DOWN	EPG	Call EPG (Electronic Program Guide)
INFO	Show channel or event Information	YouTube	YouTube function
FAV	Show Favorites list	WebTV	WebTV function
SUBTITLE	Subtitles	TEXT	Teletext mode
SLEEP	Sleep timer	REC	Press for record
F1-F4	Programmable buttons	V.FORMAT	Change screen format
OPTION	Options button	RESOLUTION	Change screen resolution
	Stop play or record	PAUSE	Press for PAUSE



- INSTALLATION

Using HDTV cable

For digital television, it is recommended to connect using an HD cable.

In case the TV has an input HD connector, it is advisable to use it to get a better image quality.

Using RCA cable

If no HD input on your TV-set you can connect the receiver to TV-set using the RCA cable.

- START USING


Switch ON receiver

Plug the receiver power adapter into an electrical outlet.

Press the power button on the remote control.

First installation and channels search

The first time you turn on the receiver, you will see the First installation menu:

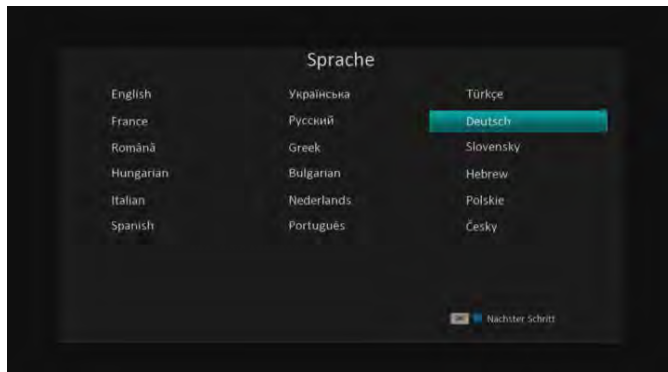

In this menu, you can select the menu language and go to the Time / Date Menu:

Date/Time

Mode

Display current date

Display current time

Daylight saving time

Time zone

Internet time

1/13/08

17:48

Disable

1:00

Back

Next step

- Software update

Software updates for the **Beta X** can be found on the Internet at: <http://www.golden-interstar.de> or in the receiver menu:

Service

Golden Media GmbH

Stuttgarter Str. 36

D-73635 Rudersberg

Tel: 0049-(0)7183 30750-0

Fax: 0049-(0)7183 30750-20

E-Mail: info@golden-media.net

Internet: www.golden-media.net

WEEE-Reg.-Nr. DE 59863460

www.golden-interstar.de

TECHNICAL SPECIFICATIONS

Video	Decoder formats	MPEG2/4, H.264, H265, AVS, AVS plus, JPEG/MJPEG HD
	Picture resolutions	HD 1.4 (1080p, 1080i, 720p, 576p, 480p)
	Picture formats	4:3, 16:9, Auto
	Video Outputs	HD OUT (1.4), CVBS
Audio	Decoder formats	MPEG1, MPEG2 Layer 1&2, Dolby Digital AC3, AAC/HE-AAC, MP3
	Audio outputs	RCA x 2 (L/R), DIGITAL OUT
USB 2.0 x 2	Volume support	Not limited
	Data formats supported	MP3, WMA, JPEG, BMP, AVI, MKV and others
Power supply	Power adapter	100~240V 50/60Hz (external power supply) to 12v DC
	Maximum energy consumption	10W
	Energy consumption in STBY mode	<0.5W

www.golden-interstar.de