

HSI-TD 70W/NDL 4K UVS

SA HSI-TD 70W/NDL UVS RX7S SL

0021031



Range features



PRODUCT OVERVIEW

Ordering number	0021031
Light colour	940 Cool White
Technology	HID
Energy class	A
Average life (Rated) (h)	9000
Lamp shape	linear
Lamp finish	clear
Dimmable	No
Cap/Base	Rx7s
Type	HSI-TD
EAN code	5410288210315
Colour temperature (K)	4200
Luminous flux (Rated) (lm)	5800
Efficacy (Rated) (lm/w)	77
Watt (Nominal) (W)	70
Voltage (V)	95

HSI-TD 70W/NDL 4K UVS

SA HSI-TD 70W/NDL UVS RX7S SL

0021031

DATA TABLE

General data

Technology	HID
Ordering number	0021031
Average life (Rated) (h)	9000
Average life (Nominal) (h)	9000
Energy class	A
Lamp finish	clear
Lamp shape	linear
Dimmable	No
Cap/Base	Rx7s
Type	HSI-TD
EAN code	5410288210315
E-number SE	8359152
Product name	SA HSI-TD 70W/NDL UVS RX7S SL
Lamp mercury content (mg)	10
Control gear required	yes
Fixture rating	enclosed
IEC Reference	IEC 60662
IEC Reference 2	IEC 62035
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	no
Sales pack quantity	10
Rated survival factor at 2000 h	1
Rated survival factor at 2000 h 50Hz	1
Rated survival factor at 4000 h	1
Rated survival factor at 4000 h 50Hz	1
Rated survival factor at 6000 h	0.97
Rated survival factor at 6000 h 50Hz	0.97
Rated survival factor at 8000 h	0.9
Rated survival factor at 8000 h 50Hz	0.9
Rated survival factor at 12000 h	0.5
Rated survival factor at 12000 h 50Hz	0.5
Rated survival factor at 16000 h	0.07
Rated survival factor at 16000 h 50Hz	0.07
Rated survival factor at 20000 h	0
Rated survival factor at 20000 h 50Hz	0

HSI-TD 70W/NDL 4K UVS

SA HSI-TD 70W/NDL UVS RX7S SL

0021031

Optical data

Light colour	940 Cool White
Colour temperature (K)	4200
Luminous flux (Nominal) (lm)	5800
Luminous flux (Rated) (lm)	5800
Ambient temperature for maximum luminous flux (°C)	25

Electrical data

kWh per 1000 hours burning time	83
Efficacy (Rated) (lm/w)	77
Watt (Rated) (W)	75
Watt (Nominal) (W)	70
Voltage (V)	95
Ignition voltage (V)	0
Current (A)	0.98

Physical data


Weight (kg)	0.01
Lamp Length (mm) - C/L	117.6
Lamp Diameter (mm) - D	22
Single package dimensions (L x W x H)	17.10 x 3.80 x 3.80
Single package volume (dm3)	0.247
Single product net weight (kg)	0.01
Single product gross weight (kg)	0.02
Single packaging weight (kg)	0.01
Outer package dimensions (L x W x H)	19.80 x 17.50 x 8.04
Outer package net weight (kg)	0.12
Outer package gross weight (kg)	0.39
Outer package volume (dm3)	2.786
Outer packaging weight (kg)	0.27
Units per outer package	10

HSI-TD 70W/NDL 4K UVS



SA HSI-TD 70W/NDL UVS RX7S SL

0021031

PHOTOMETRY

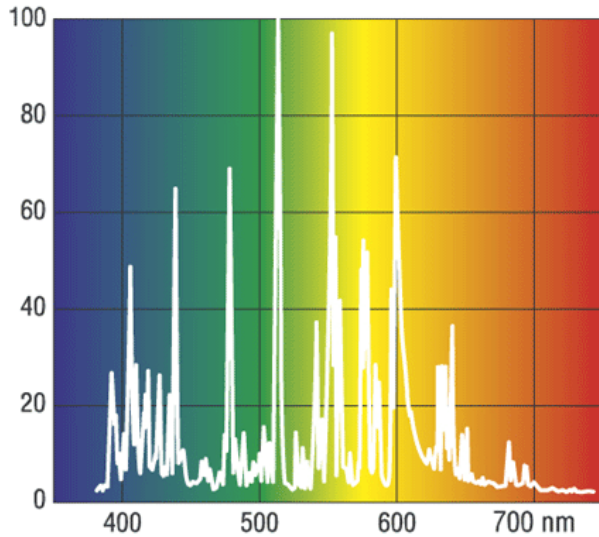

TECHNICAL DRAWINGS

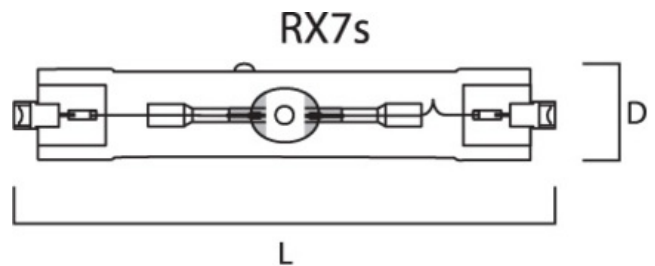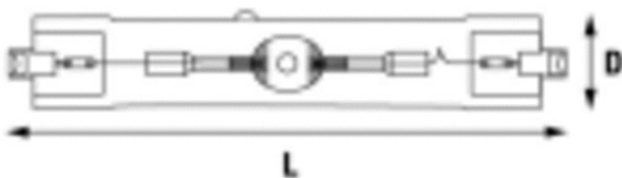

ENERGY LABEL

