


**REB-1N / REB-1NE /
REB-2,5N / REB-2,5NE**



Electronic single phase speed controllers. Available in wall box or flush mount versions.
Fuse protected + spare fuse included.
Minimum speed adjustment.
Single ON/OFF and speed regulation control knob.

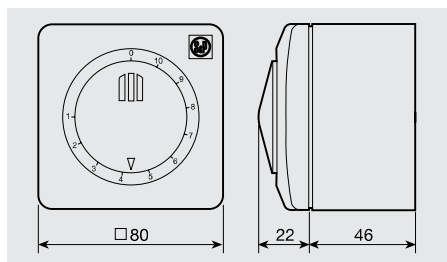

Model	Electrical supply		IP Protection	Power (VA)	Maximum current (A)	Minimum current (A)	Class	Operating temperature range (°C)
	Frequency (Hz)	Voltage (V)						
REB-1N/1NE	50-60	220-240	IP44	220	1	0,15	Class II	0 / +40
REB-2,5N/2,5NE				550	2,5	0,15		



LxWxH (mm): 83 x 81 x 160

REB-5

Electronic single phase speed controller.
Surface mounted.
Fuse protected.
Minimum speed adjustment.
Separate ON/OFF switch.

Model	Electrical supply		IP Protection	Power (VA)	Maximum current (A)	Class	Operating temperature range (°C)
	Frequency (Hz)	Voltage (V)					
REB-5	50-60	230	IP54	1150	5	Class I	+5 / +35



LxWxH (mm): 115 x 95 x 195

REB-10

Electronic single phase speed controller.
Surface mounted.
Fuse protected.
Minimum speed adjustment.
Separate ON/OFF switch.

Model	Electrical supply		IP Protection	Power (VA)	Maximum current (A)	Class	Operating temperature range (°C)
	Frequency (Hz)	Voltage (V)					
REB-10	50	230	IP54	2300	10	Class I	+5 / +35