
# MZH 3015 MZH 3040 Installed sound goosenecks

#### **FEATURES**

- Sturdy and elegant metal gooseneck for unobtrusive miking
- RF shielding against intermodulation from wireless equipment/devices

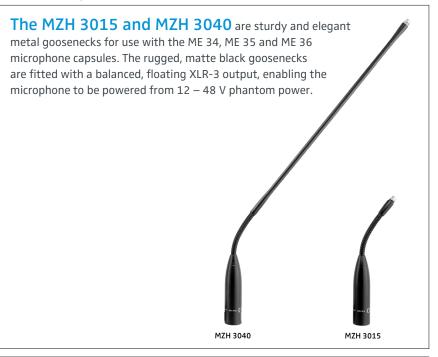

# ARCHITECT'S SPECIFICATIONS


The unit shall be streamlined in appearance, with a boom diameter of 8 mm (.31") and an overall length of 15 cm (5.9") and 40 cm (15.75"). It must also be finished with a durable anti-reflective matte black coating and have a pre-amp housed with its XLR-3 connector housing. The unit must be mountable using a table stand, direct to surface receptacle or via a silent shock mount system. The unit shall accept the ME34, ME35 and ME36 microphone capsules. The unit shall be a Sennheiser MZH 3015. The unit shall be a MZH 3040.


### **TECHNICAL DATA**

Connection	XLR 3
Phantom Powering	P 12 - P48 V
Coating	matte black
Diameter	6 mm (0.24")
Length	150 mm (5.91")
	400 mm (15.75")
Number of flexible elements	1
Weight (goosenecks)	73 g (23 oz.)
	120 g (38 oz.)
Delivery includes	MZH 3015
	MZH 3040



## MZH 3015 MZH 3040 Installed sound goosenecks

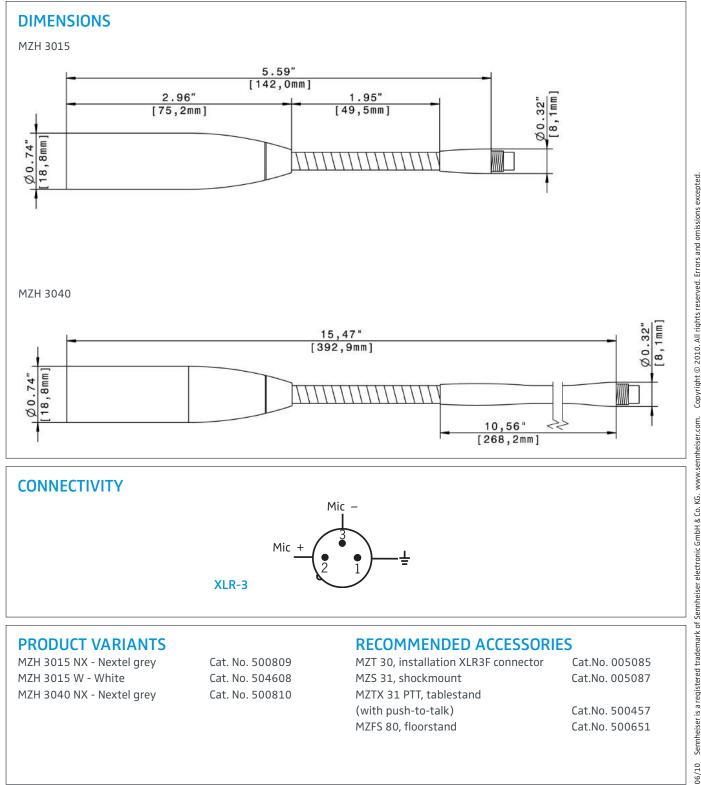

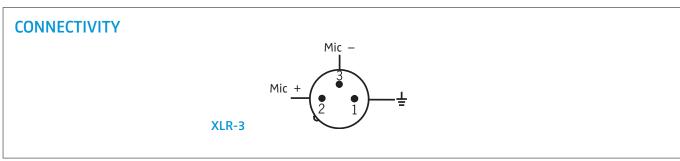

#### **PRODUCT VARIANTS**

MZH 3015 NX - Nextel grey MZH 3015 W - White MZH 3040 NX - Nextel grey Cat. No. 500809 Cat. No. 504608 Cat. No. 500810

### RECOMMENDED ACCESSORIES

MZT 30, installation XLR3F connector Cat.No. 005085 MZS 31, shockmount Cat.No. 005087

MZTX 31 PTT, tablestand

Cat.No. 500457 (with push-to-talk) MZFS 80, floorstand Cat.No. 500651

Sennheiser electronic GmbH & Co. KG Am Labor 1, 30900 Wedemark, Germany www.sennheiser.com