


Quiet ComfortPLUS

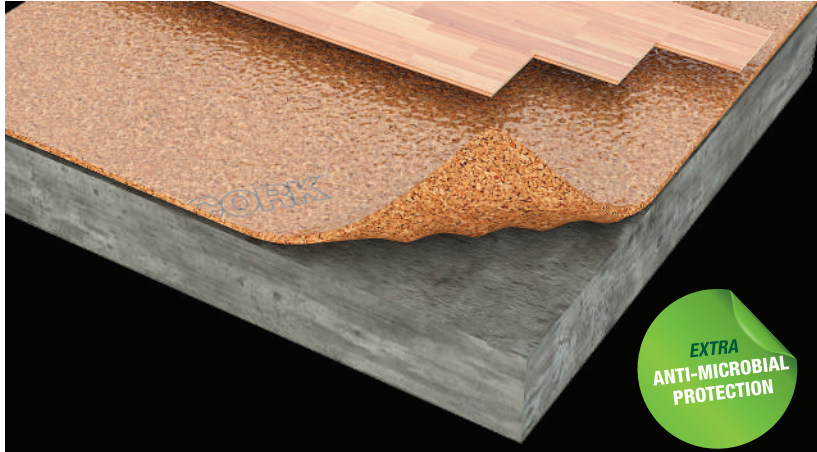

NATURAL & SUSTAINABLE
HIGH PERFORMANCE
UNDERLAYMENT
PLUS VAPOR BARRIER
FOR FLOATING FLOORS

* The Wave Texture Allows for Increased Air Flow for the Subfloor, Resulting in Extra Protection Against Mold, Mildew & Microbial Growth on the Subfloor

Integrated Moisture Barrier for Easy Installation

The Natural Alternative to Synthetic Foams

Reduces Step Sound & Impact Noise

Increases Walking Comfort - Helps Insulate Cold Floors



PRODUCT DESCRIPTION

Wave Textured - High Performance Agglomerated Cork Underlayment Plus Vapor Retarding Barrier for Floating Flooring Applications



ENVIRONMENTAL PROPERTIES

Recycled Content (LEED - MR 4)
Rapidly Renewing Content (LEED -MR 7)
(85%+ Recycled & Renewable Content)



PHYSICAL AND MECHANICAL PROPERTIES

Density: 11.5 to 13 lbs. ft
Tensile Strength: > 150 KPa
Compression (100PSI)≈30%
Recovery: > 90%
Durability: Lifetime of the Building



CERTIFIED BY SCS Global Services



ACOUSTICAL RESULTS

(ASTM E 90, E 492, E 413 & E 989)
IIC 69 (NGC - 7007087)
STC 67 (NGC- 5007039)
(6" Concrete Slab w/Ceiling)
(ASTM E 1007 & E989)
FIIC 65 (Octave Acoustique)
(8" Concrete Slab No Ceiling)



PACKAGING*

1m x 10m x 2.5mm (107.75 s/f)
(39.4" x 32.75' x 0.093")
* Others sizes available upon request
24 Rolls per Pallet



OTHER FEATURES & BENEFITS

Helps Bridge Minor Subfloor Defects
Thermal Insulator - Floors Feel Warmer
Reduces In Room Step Sound
Rated for Multi-Family Applications
Resistant to Mold & Mildew



AMORIM

Amorim Cork Composites

AcustiCORK®

SOUND CONTROL UNDERLAYMENTS