




## CAT3 - 25, 50 PORT 1U

### PRODUCT DESCRIPTION

- The barpa Voice Patch Panel is 19" rack mounted, available in 25 and 50 ports. Both 1U. All ports are numbered and is suitable for voice applications.

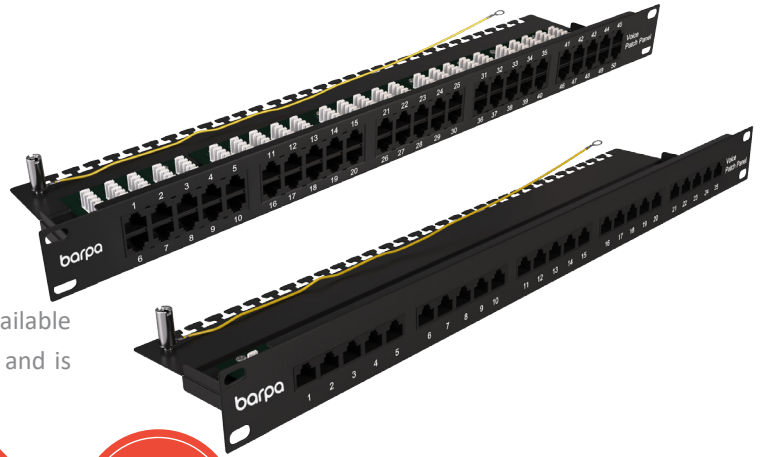

#### • STANDARD CONFORMITY

ISO/IEC 11801 ed.2.2; EN50173-1; ANSI/TIA 568-B.2-1

#### • FEATURES

Supplied with rack mounting kit, also with earth connection

For 110 & Krone Punchdown Tool

Full port labelling

#### • PHYSICAL CHARACTERISTICS

Chassis	Black Electrostatic Powder-Coated Steel: phosphor bronze with tin plating over nickel
Color	Black (RAL9005)
Plastic	Fire self-extinguish high impact plastic

#### • ELECTRICAL CHARACTERISTICS

Contact Resistance (MΩ)	200
Insulation Resistance (MΩ Min 500V DC)	500
Withstand Voltage	DC 1000V AC 700V RMS 60Hz, 1min

#### • ENVIRONMENTAL CONDITIONS

Operating Temperature (°C)	-10 to +60
Storage Temperature (°C)	-40 to +70

#### • MECHANICAL SPECIFICATIONS

Color Code	TIA/EIA 568A (international) and 568B (AT&T Standard) Wiring For Easy Installation
IDC Contacts - Solid Cable	Accept 22-24 AWG solid with a insulation diameter of 0.55-0.45 mm
IDC Contacts - Stranded Cable	Accept 22-26 AWG stranded with a insulation diameter of 0.76-0.48 mm
Insertion Life	750 times plugging
Plug Inforce (N)	< 30
Cable OD (mm)	5.0 - 8.5
Contact	Phosphor bronze with 4-6µ" gold plating

This document is authored and owned by barpa. It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice. The pictures/ drawings are merely illustrative.


More information: [info@barpa.eu](mailto:info@barpa.eu) or in [www.barpa.eu](http://www.barpa.eu)

### • ORDER INFORMATION

Code	Description	Unit Weight (kg)	Inner Box		Carton		EAN Code
			Size (mm)	Quantity (un)	Size (mm)	Quantity (un)	
82231201125	Voice Cat 3 25 ports 1U	1.20	505x120x55	1	520x260x300	10	5608445005120
82231201150	Voice Cat 3 50 ports 1U	1.20	505x120x55	1	520x260x300	10	5608445005137

### TECHNICAL DRAWING (mm)

#### • 82231201125

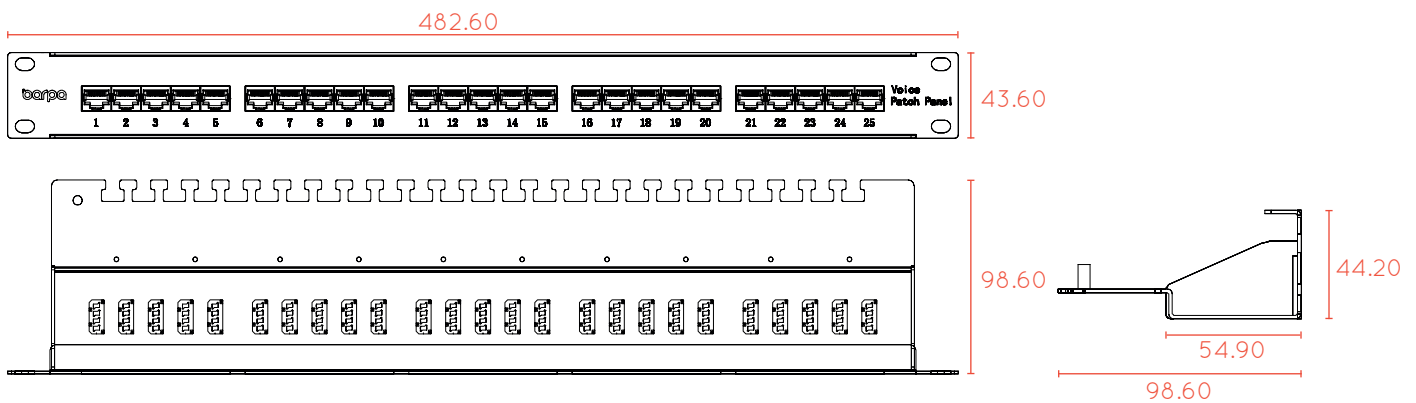

#### • 82231201150

